

Oliver


- Multifunctional pendant luminaire available with a wide range of different light sources for general or accent lighting
- Equipped with either electronic or conventional control gears
- Housing in extruded aluminium and thermoplastic, prismatic reflector in acrylic
- Standard with 3m wire suspension and 4m cable, longer lengths on request
- Available with different sized acrylic and aluminium reflectors



Product specifications

Protection	IP20, CAT 1/2
Colour	Silver, White, Black
Gear	Electronic (HF), Conventional
Lightsource	FSMH-120/2G8 FSMH-32/GX24q-3 FSMH-42/GX24q-4 FSMH-60/2G8 FSMH-85/2G8 FSQ-13/G24q-1 FSQ-18/G24q-2 FSQ-26/G24q-3 MCS-100/E27 MCS-150/E27 MCS-70/E27 MES-250/E40 MT Shoplight-70/G12 MT-35/G12 MT-70/G12 PAR20 MR-35/E27 PAR30 MR-35/E27 PAR30 MR-70/E27 STH-100/GX12 STH-100/PG12-1 STH-50/GX12 STH-50/PG12-1
Reflector	Faceted reflectors: SPf 12°, FLf 24°, WFLf 44°, VWFLf 60° Non-faceted reflectors: SP 7°, FL 22°, WFL 30° Beam angle PAR20: SP 10°, FL 30° Beam angle PAR30: SP 10°, FL 30°, WFL 40°

Measurements

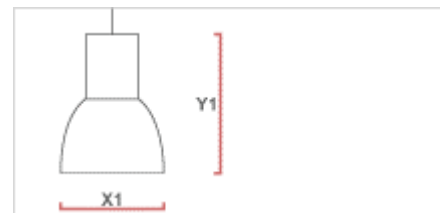

816

816

less than
100W

X1: 406
Y1: 480

**100W or more and all
FSMH/2G8**

X1: 406
Y1: 530

valo  **forum**

www.valoforum.com

Valo-Forum Oy Kässälänkatu 10, 33560 Tampere
puh. 02074 34480, fax. 02074 34488
valoforum@valoforum.com

Valo-Forum Helsinki Kutomotie 6 A, 00380 Helsinki
puh. 09 3424 720, fax. 09 3424 7240
sales@valoforum.com